

# Starlink SL9003T1



## T1/E1 Digital Transmission System

# Maximize audio and data payload...

**Starlink SL9003T1** T1/E1 STL is a fully integrated program audio, voice, and data transport system that combines Moseley's reputation for high quality aural Studio-Transmitter Links with digital T1/E1 technology.

## STARLINK T1/E1 STL: THE RIGHT CHOICE FOR YOUR STATION

T1/E1 circuits are widely available at declining prices. They have no distance or line-of-sight terrain restrictions. This makes T1/E1 an ideal transport medium for STL/TSL and Intercity links.

The bidirectional high payload capacity of a T1/E1 circuit can significantly reduce a station's communications costs compared to using discreet audio, telephone, and data circuits.

### STL

- Program Audio
- HD Radio™ Audio and Data Stream

### TSL

- Remote Pickup (RPU)
- Satellite Downlink
- Off-Air Monitor

### DATA

- Remote Mirrored Server
- IP-Based Equipment Control
- Surveillance and Security
- Internet and E-mail
- RDS / RBDS data
- Transmitter Remote Control

### VOICE

- Telephone OPX
- Intercom Channels



*With **Starlink's** open architecture, simply choosing the appropriate modules and daughter cards creates a custom configuration matched to your station's needs.*

## INTELLIGENT MULTIPLEXER: THE HEART OF THE STARLINK

The Intelligent Multiplexer is the host for the specialized plug-in daughter cards used to transport data streams and voice grade audio channels. This unique Starlink design provides a space and bandwidth efficient method of adding these services to the multiplex.

- 10/100Base-T Ethernet Bridge @ 9.6-2,048 kbps
- RS-232 asynchronous data @ 300 bps-38.4 kbps
- High-speed synchronous data @ 8 kbps-2,048 kbps
- FXO/FXS 2-wire telephone
- E&M telephone, 4-wire voice with signaling

The Intelligent Multiplexer also supports the built-in T1 CSU, or E1 network interface.

---

MOSELEY ASSOCIATES, INC. IS THE LEADER IN DIGITAL STL TRANSMISSION SYSTEMS FOR THE BROADCASTING INDUSTRY. FOR MORE INFORMATION, VISIT US AT [www.moseleysb.com](http://www.moseleysb.com).

## CD QUALITY DIGITAL AUDIO

Because it is digital, the Starlink SL9003T1 can deliver an exact copy of its input to the output with no distortion or noise buildup associated with analog STL systems. This results in CD-quality audio with crystal-clear highs and breathtaking lows that make a station stand out on the dial.

The Starlink's source encoder/decoder modules provide up to 22.5 kHz audio frequency response. Both digital and analog inputs and outputs are included for flexible connection to digital and analog studios and transmitters.

Optional MPEG Layer II daughter cards can be added to increase the number of program channels as well as voice and data payload transported over a T1/E1 link.

## STARLINK SYSTEM MANAGEMENT


The Starlink SL9003T1 features easy to read front panel VU meters, indicators, and soft-touch controls. The Windows®-based graphic interface software provides convenient configuration of the Intelligent Multiplexer and the daughter cards. A built-in remote management channel allows monitoring and control of the remote Starlink chassis over the T1/E1 link.

## HD RADIO™ READY TODAY


The Starlink SL9003T1 meets all the requirements for IBOC digital radio. The Starlink transports AES/EBU digital audio at all the approved sample rates along with Ethernet data to provide all the signals necessary for the audio, multicasting, and data-casting services. With Starlink, stations can get the most out of HD Radio™ conversion now and in the future.

*Starlink SL9003T1 creates your station's custom bidirectional local area / wide area program audio, voice, and data network.*

- Linear uncompressed audio
- 32, 44.1, or 48 KHz sample rates
- Input: AES/EBU Digital or Analog (L+R)
- Output: AES/EBU Digital and Analog (L+R)
- XLR connectors
- Built-in RS-232 data channel
- Optional MPEG Layer II compression

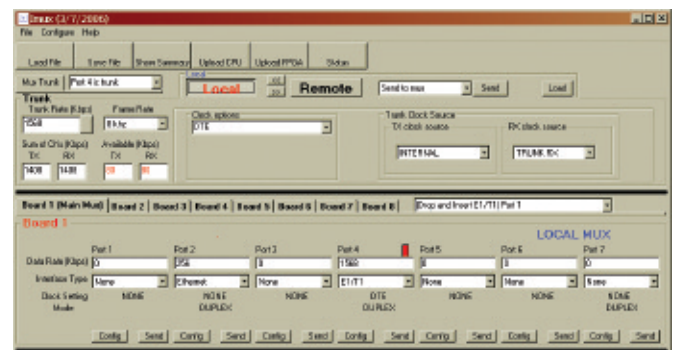

*Graphical User Interface software makes your SL9003T1 system simple to manage and configure.*

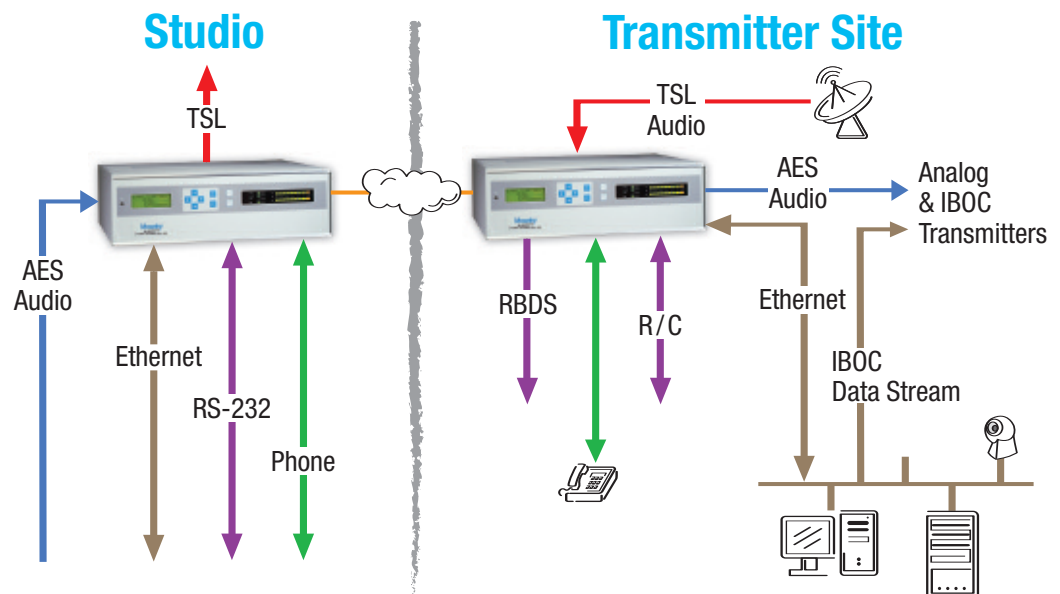

# ...over any distance or terrain.



### SYSTEM

FREQUENCY RESPONSE	< 5 Hz to 22.5 KHz (48 kbps), < 5 Hz to 15 kHz (32 kbps)
DISTORTION	< 0.01% at 1 kHz
SAMPLE RATE	Selectable 32, 44.1, 48 kHz, built-in rate converter
DYNAMIC RANGE	90 dB static encoder/decoder
LATENCY	Linear 0 ms, ISO/MPEG 49 ms
CROSS TALK	-80 dB
BIT ERROR IMMUNITY	> 10 <sup>-4</sup> with no subjective loss in audio quality (ISO/MPEG)
LEVEL STABILITY	< 0.2 dB

### SOURCE ENCODER & DECODER

AUDIO CONNECTORS	Input - XLR Male, Output - XLR Female
AUDIO SAMPLE RATES	32/44.1/48 kHz selectable, built-in rate converter
ANALOG AUDIO INPUT	Electronically balanced, 600/10k $\Omega$ selectable, CMRR>60 dB
ANALOG AUDIO OUTPUT	Electronically balanced, low-Z/600 $\Omega$ selectable
ANALOG AUDIO LEVELS	-10 dBu to +18 dBu
DIGITAL AUDIO	AES/EBU or SPDIF selectable
AES/EBU INPUTS/OUTPUTS	Transformer balanced, 110 $\Omega$
SPDIF INPUTS/OUTPUTS	Unbalanced, 75 $\Omega$
DATA INPUT/ OUTPUT CONNECTORS	9-pin D male, RS-232
DATA INPUT RATES	Async, 300-9600 bps selectable
ISO/MPEG MODES	Mono, Dual Mono, Joint Stereo, Stereo (ISO/IEC 111172-3 Layer II)
ISO/MPEG SAMPLE RATES	32/44.1/48 kHz selectable
DATA RATES	32/48/56/64/80/96/112/128/160 /192/224/256/320/384 kbps selectable
TRUNK OUTPUT CONNECTOR	15-pin D Female
TRUNK OUTPUT TYPES	Synchronous V.35 or RS-449

### INTELLIGENT MULTIPLEXER

PORTS	0 to 6 (Internal), 0 to 42 (External)
AGGREGATE RATES	Up to 2,048 Mbps
CLOCKS	Internal, Derived, External
TRUNK	V.35, RS-449, EIA-530 or T1/E1

### DATA OPTIONS

INTERFACE MODES	V.24/RS-232, EIA-530, V.35, V.36/RS-422, V.11/RS-449
ASYNCHRONOUS RATES	1200 - 115,200 bps
SYNCHRONOUS RATES	To 16 Mbps
CONNECTOR	RJ-45

### LAN OPTIONS

TYPE	10/100Base-T
STANDARD	Ethernet IEEE 802.3 bridge
CONNECTOR	RJ-45 (2 ports)
SPEEDS	8 – 8192 kbps

### VOICE OPTIONS

TYPE	4-Wire, 2-Wire, FXO, FXS
CONNECTOR	RJ-45
FREQUENCY RANGE	300 – 3000 Hz
DATA RATES	16, 24, 32 kbps ADPCM or 64 kbps
SIGNALING	E&M supported

### T1 INTERFACE

CSU	Built-in
CONNECTOR	RJ-45
IMPEDANCE	100 $\Omega$ balanced
LINE CODES	B8ZS, AMI
FRAMING	ESF, D4
LINE LENGTH EQ.	0 – 655 Ft.
REDUNDANCY	Optional Redundant T1 Interface

### E1 INTERFACE

CONNECTOR	RJ-45, BNC adaptor
IMPEDANCE	100 $\Omega$ balanced, 75 $\Omega$ unbalanced
LINE CODES	HDB3
FRAMING	256N, 256S, with/without CRC-4
COMPLIANCE	CCITT Rec. G.703, G.704, G.732
REDUNDANCY	Optional E1 Interface

### SYSTEM MANAGEMENT

DISPLAY	Front panel LCD - menu driven
VU METER	Front panel Stereo 10-segment bargraph with Clip Indicator
LOOPBACK	Local and Remote
USER INTERFACES	Command line for terminal program Windows®-based user interface software
NETWORK MANAGEMENT	Built-in communications channel for control of remote Starlink across the link
CONNECTOR	9-pin D female RS-232

### PHYSICAL

POWER	Universal AC 90-260V, 47-63 Hz Optional Redundant Power Supply Optional 24Vdc, 48Vdc supply
DIMENSIONS	17" w x 14" d x 5.2" h (43.2cm x 35.6cm x 13.2cm)
MOUNT	19" Rack Mount – 3 Rack Units
TEMPERATURE	-20°C to 60°C Operational
HUMIDITY	90% Noncondensing
REGULATORY	FCC Part 68, FCC Part 15